


DRILL RODS

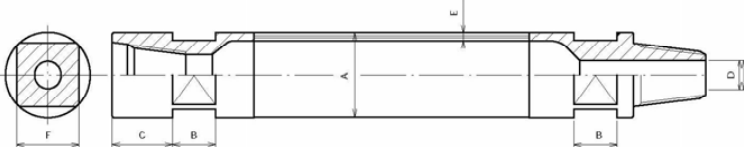

Maxdrill Rock Tools Co., Ltd


KEMAICO PR RODS PERCUSSION ROTARY RODS

FRICTION WELDED RODS THREADS NITRATED							
							
Description	Thread type	Weight	O.D.	I.D. coupling	Wall thickness	Width spanner	Across flat
AWJ HD × 1500 mm	AWJ	8	44.4	16	6.3	20	36
AWJ HD × 2000 mm	AWJ	11	44.4	16	6.3	20	36
AWJ HD × 3000 mm	AWJ	15	44.4	16	6.3	20	36
BWJ HD × 1500 mm	BWJ	10	54	19	6.3	32	46
BWJ HD × 2000 mm	BWJ	13	54	19	6.3	32	46
BWJ HD × 3000 mm	BWJ	19	54	19	6.3	32	46
70 × 1000 mm	RD 50-6	12	69.9	25	4	40	49
70 × 1500 mm	RD 50-6	16	69.9	25	4	40	49
70 × 2000 mm	RD 50-6	20	69.9	25	4	40	49
70 × 3000 mm	RD 50-6	27	69.9	25	4	40	49
70 × 1000 mm	API 2"3/8 Reg	11	76	30	4	40	49
76 × 1500 mm	API 2"3/8 Reg	15	76	30	4	40	65
76 × 2000 mm	API 2"3/8 Reg	18	76	30	4	40	65
76 × 3000 mm	API 2"3/8 Reg	25	76	30	4	40	65
76 HD × 1000 mm	API 2"3/8 Reg	15	76	30	6.35	40	65
76 HD × 1500 mm	API 2"3/8 Reg	20	76	30	6.35	40	65
76 HD × 2000 mm	API 2"3/8 Reg	26	76	30	6.35	40	65
76 HD × 3000 mm	API 2"3/8 Reg	36	76	30	6.35	40	65
89 × 1500 mm	API 2"3/8 Reg	19	89.1	25	4	40	65
89 × 2000 mm	API 2"3/8 Reg	25	89.1	25	4	40	65
89 × 3000 mm	API 2"3/8 Reg	31	89.1	25	4	40	65
89 HD × 1000 mm	API 2"3/8 Reg	18	89.1	25	6.35	40	65
89 HD × 1500 mm	API 2"3/8 Reg	25	89.1	25	6.35	40	65
89 HD × 2000 mm	API 2"3/8 Reg	31	89.1	25	6.35	40	65
89 HD × 3000 mm	API 2"3/8 Reg	44	89.1	25	6.35	40	65
114 × 1500 mm	API 3"1/2 Reg	36	114.3	42	6.35	50	95
114 × 2000 mm	API 3"1/2 Reg	45	114.3	42	6.35	50	95
114 × 3000 mm	API 3"1/2 Reg	61	114.3	42	6.35	50	95
114 × 4500 mm	API 3"1/2 Reg	87	114.3	42	6.35	50	95
114 × 6000 mm	API 3"1/2 Reg	111	114.3	42	6.35	50	95
140 × 1500 mm	API 4"1/2 Reg	52	139.7	57	6.35	50	114
140 × 2000 mm	API 4"1/2 Reg	62	139.7	57	6.35	50	114
140 × 3000 mm	API 4"1/2 Reg	83	139.7	57	6.35	50	114
140 × 4500 mm	API 4"1/2 Reg	117	139.7	57	6.35	50	114
140 × 6000 mm	API 4"1/2 Reg	146	139.7	57	6.35	50	114

Threads and wall thickness upon request.

KEMAICO DRILL RODS FOR CARROUSEL PIPE CHANGER

DRILL RODS FOR HAUSHERR, DOMINE, BONNE ESPERANCE RIGS

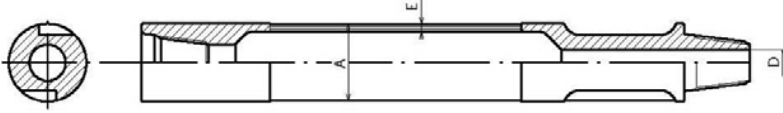FRICTION WELDED RODS THREADS NITRATED					
					
Description	Weight	Thread type	O.D	I.D.END	Wall thickness
76HD×3000mm	39	API 2"3/8 Reg	76	30	6.35
76 HD×3200mm	41	API 2"3/8 Reg	76	30	6.35
76 HD×4500mm	56	API 2"3/8 Reg	76	30	6.35
76 HD×6000mm	73	API 2"3/8 Reg	76	30	6.35
76 EP8×3000mm	46	API 2"3/8 Reg	76	30	8
76 EP8×3200mm	58	API 2"3/8 Reg	76	30	8
76 EP8×4500mm	66	API 2"3/8 Reg	76	30	8
76 EP8×6000mm	86	API 2"3/8 Reg	76	30	8
80×1600mm	32	API 2"3/8 Reg	80	25	8
80×3000mm	54	API 2"3/8 Reg	80	25	8
80×3200mm	57	API 2"3/8 Reg	80	25	8
80×4500mm	78	API 2"3/8 Reg	80	25	8
80×6000 mm	101	API 2"3/8 Reg	80	25	8
89 HD×3000 mm	50	API 2"3/8 Reg	89.1	25	6.35
89 HD×3200 mm	53	API 2"3/8 Reg	89.1	25	6.35
89 HD×4500 mm	70	API 2"3/8 Reg	89.1	25	6.35
89 HD×6000 mm	90	API 2"3/8 Reg	89.1	25	6.35
89 EP8×3000 mm	58	API 2"3/8 Reg	89.1	25	8
89 EP8×3200 mm	61	API 2"3/8 Reg	89.1	25	8
89 EP8×4000 mm	74	API 2"3/8 Reg	89.1	25	8
89 EP8×4500 mm	82	API 2"3/8 Reg	89.1	25	8
89 EP8×6000 mm	106	API 2"3/8 Reg	89.1	25	8
114×3000 mm	69	API 3"1/2 REG	114.3	42	6.35
114×4500 mm	96	API 3"1/2 Reg	114.3	42	6.35
114×6000 mm	122	API 3"1/2 Reg	114.3	42	6.35
114 EP8×3000 mm	79	API 3"1/2 Reg	114.3	42	8.8
114 EP8×4500 mm	110	API 3"1/2 Reg	114.3	42	8.8
114 EP8×6000 mm	142	API 3"1/2 Reg	114.3	42	8.8

FLUSH DRIL RODS FOR ATLAS COPCO AND BOHLER RIGS

FRICTION WELDED RODS THREADS NITRATED					
Description	Weight	Thread type	O.D	I.D.END	Wall thickness
76 HD ×3720 mm	55	API 2"3/8 Reg	76	30	6.3
76 HD ×6000 mm	85	API 2"3/8 Reg	76	30	6.3
89 EP8 ×3720 mm	69	API 2"3/8 Reg	89.1	25	8.8
89 EP8 ×6000 mm	105	API 2"3/8 Reg	89.1	25	8.8
114 EP8 ×3720 mm	75	API 3"1/2 Reg	114.3	42	8.8
114 EP8 ×6000 mm	119	API 3"1/2 Reg	114.3	42	8.8

Threads and wall thickness upon request.



MAXDRILL ROCK TOOLS CO., LTD
KEMAI MACHINERY & EQUIPMENT CO., LTD

Add: Room 408, 4/F, Tower A, Chengshi Fangzhou Building, NO. 25, Zunyi Road Guiyang, Guizhou, China

Tel: +86-851-88639105/06 Fax: +86-851-88639108

E-mail: office@kemaico.com info@kemaico.com

Web: www.max-drilling.com www.kemaico.com www.maxdrill.com.cn